



## JNR MINI BEAM 1R

■ JNR-8164A

The MINI BEAM 1R adopts 1 PC 100W which features high brightness and stability. It is made of a new type of high temperature strength of engineering plastics and cast aluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, nightclubs and discos.


### Specification

- Input Voltage: AC 90-260V 50/60Hz
- Light Source: A YODN 100W lamp
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 13/14/16 DMX channels USITT DMX-512
- Power Consumption: 170W
- Dimensions: 226(D)\*214(W)\*317(H)mm
- Packing Dimensions: 295(D)\*280(W)\*385(H)mm
- Net Weight: 7.92kg
- Gross Weight: 9.28kg


**Detail**

- A YODN 100W lamp(6000 hours)
- Electronic ballast and power supply
- 8/16 Bit smooth and precise resolution for pan/tilt movement
- Scan position memory, auto reposition after unexpected movement
- 3.2° Beam angle
- Improved optics and flat beam field
- No need for adjustment of reflector or lamp
- Anti-reflection 96mm front lenses
- 1 Static gobo wheel with 11 gobos plus open
- 1 Color wheel with 12 colors plus open
- Variable direction rainbow effect with speed adjustable
- Motorized focus from near to far
- 16-facet prism with variable speed and direction
- 16-facet+8-facet prisms with variable speed and direction
- Combined prism effect by 16-facet prism and 6-facet+8-facet prisms with variable speed and direction
- Frost filter available (Hybrid effect for wash)
- Dual flag mechanical dimming system
- 20T/sec high speed LED shutter/strobe effect with variable speed
- Preset variable/random strobe and dimming pulse effect
- 13/14/16 DMX channels USITT DMX-512

- IDMX512, master-slave, and sound activated controllable or auto operation
- DMX recorder and edit function integrated
- 2.4" TFT LCD display (320\*240pix) with 4 light touch control buttons
- Display reversible for up side down application
- Powercon IN/OUT
- 3-Pin XLR connectors IN/OUT
- Fan cooling system
- Constant temperature readout and management function
- Lamp using time readable on the display
- -35-45°C max ambient temperature
- IP20
- 1\*1/4 Turn fastening Omega clamps
- 1\* Safety attachment point available

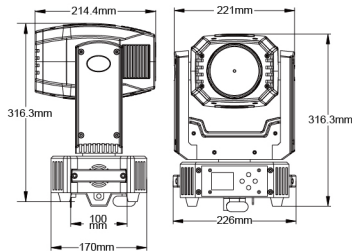

**Light Output** (FC=LUX × 0.0929)

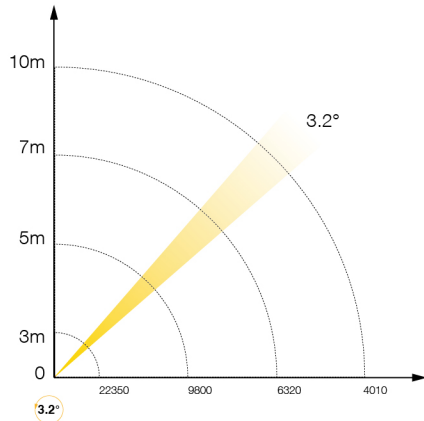

**7.92KG**