



The JNR BAR 7x30 adopts 7 PCS 30W 3-in-1 LEDs (RGB) which features high brightness and stability. And it is made of a new type of high temperature strength of aluminum casing with nice outlook. It's available independently controlled and linkable with each other for operation. JNR-BAR 7x30 is applicable for large-scale live performances, theater, studio, nightclubs and discos.



JNR BAR 7x30

■ JNR-8021

Specification


- Input Voltage: AC 90-260V 50/60Hz
- LED Quantities: 7 PCS 30W LEDs (3-in-1, RGB)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 2/3/5/8/21/23 DMX channels
- Power Consumption: 135W
- Dimensions: 500(W)*85(D)*140(H)mm
- Packing Dimensions: 700(W)*180(D)*245(H)mm
- Net Weight: 3.2kg
- Gross Weight: 4.1kg

CE | LED | $\sim 0.2m$ | IP₂₀ | T_c100°C | T_a40°C |


Detail

- 7x30W tri color LEDs (3-in-1, RGB)
- 16.7 Millions of colors mixable
- 50,000 Hours lifespan and lower power consumption
- Stunning light output with high intensity and high color rendering index
- 0-100% Smooth linear electronic dimmer
- Flicker free control capability
- 25T/s high speed LED shutter/strobe effect with variable speed
- Dynamic macro effect with variable speed
- 12 Internal color running programs, available for strobe effect to gether
- 13 DIY internal color running programs with background.
- Foreground colors changeable, available for strobe effect to gether
- DMX512, master-slave and sound activated controllable or auto operation
- 2/3/5/8/21/23 DMX channels
- Rugged, die cast aluminum alloy, compact and light weight
- Noise free natural cooling system
- Front window with tempered glass
- 2 Multi-positioning brackets for floor projection or hanging projection
- Manual tilt angle adjustment

- 4-button red LED display
- IP20 rated lockable power connectors IN/OUT
- IP20 rated lockable 3-pin XLR DMX connectors IN/OUT
- -45°C to 45°C operation temperature
- IP20

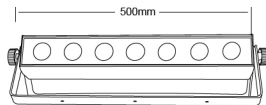

Light Output (FC=LUX × 0.0929)

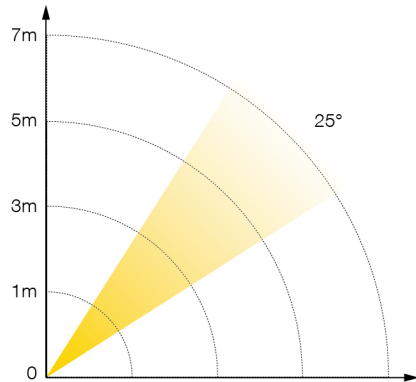

| | | | | |
|-----|------------|------------|----------|----------|
| R | 240 / 2574 | 37 / 396 | 13 / 143 | 7 / 77 |
| G | 245 / 2640 | 35 / 374 | 13 / 143 | 7 / 71 |
| B | 323 / 3476 | 41 / 440 | 15 / 165 | 8 / 82 |
| RGB | 848 / 9130 | 123 / 1321 | 41 / 440 | 22 / 234 |