



## JNR ELLIPSOIDAL 120C


■ JNR-8141E

JNR ELLIPSOIDAL 120C adopts 120W COB LED (available for cool white) which features high brightness and stability. It is made of a new type of high temperature strength of cast aluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, nightclubs and discos.

### Specification

- Input Voltage: AC90-260V 50/60Hz
- LED Quantities: 120W COB LED(cool white)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 1/3 DMX channels USITT DMX-512
- Power Consumption: 160W
- Dimensions: 636(D)\*186(W)\*394(H)mm
- Packing Dimensions: 325(D)\*680(W)\*330(H)mm
- Net Weight: 6.25kg
- Gross Weight: 8.0kg

**Light Output** (FC=LUX × 0.0929)

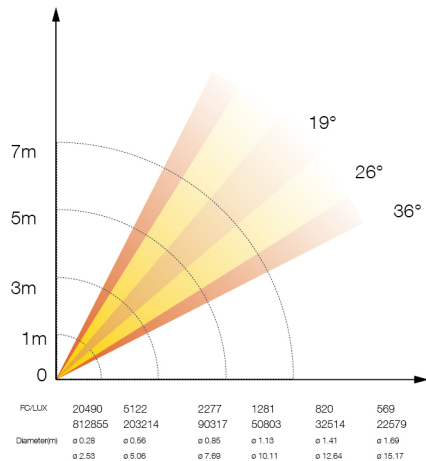

**Detail**

- 120W COB LED(available for cool white), 50,000 hours
- Color Rendering Index(CRI): Ra ≥ 95
- Optimized high definition optical system for improved photometric performance and field uniformity
- Projector-quality, high contrast aspheric lens
- Glass reflector that removes greater than 90% infrared radiation (heat) and reflects greater than 95% of visible light
- Lens tube interchangeable with filed angles available for 19°/26°/36°
- Flat and even spot image
- Smooth manual focus system
- Beam edge continually adjustable hard-to-soft
- Housing made by high intension fireproof black ABS
- Thermally insulated rear handle
- Thermally insulated knobs and single aluminum handle for installing
- 3 Metal spot cutting slots
- Barn door included
- Glass/Metal gobo slot as optional
- Color frame as optional
- Manual IRIS system as optional
- 0-100% Smooth and precise linear dimmer
- 25T/sec high speed shutter/strobe effect with variable speed
- Preset variable/random strobe and dimming pulse

- effect
- DMX512, master-slave, and sound control or auto operation
- 1/3 DMX channels USITT DMX-512
- 4-Button LCD display
- Powercon connector IN/OUT
- 3-Pin XLR connectors IN/OUT
- Low noise fan integrated with copper liquid cooling system
- -35~45°C max ambient temperature
- IP20
- 1\*Safety attachment point

