



## JNR PAR 18x15

■ JNR-8078B

The JNR PAR 18x15 adopts 18 PCS 15W 5-in-1 LEDs (RGBAW) which features high brightness and stability. It's made of a new type of high temperature strength of castaluminum casing with IP65 rating. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It's available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, nightclubs and discos.


### Specification

- Input Voltage: AC 90-260V 50/60Hz
- Light Source: 18x15W LEDs (5-in-1, RGBAW)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 5/9 DMX channels USITT DMX-512
- Power Consumption: 270W
- Dimensions: 335(D)\*235(W)\*300(H)mm
- Packing Dimensions: 250(D)\*250(W)\*360(H)mm
- Net Weight: 5.88kg
- Gross Weight: 6.64kg

## Detail

- 18x15W LEDs (5-in-1, RGBAW), 50,000 hrs
- Infinite RGBAW color mixing system and rainbow effect
- 16.7million additive RGBAW colors whit full saturation control
- 25° beam angle
- Built-in programs that could be called up via a DMX controller
- 20t/s strobe effect and pulse strobe effect
- 0-100% electronic dimming and blackout for all LEDs
- Independent ID address
- Different white colors setting
- DMX512, Master-Slave, Sound Activated and auto operation
- 5/9 DMX channels
- 4-button LED display on rear panel
- Aluminum die-casting structure design with optimum cooling system
- Dual bracket system available for setting the fixture on the ground or hanging
- IP65 power connectors IN/OUT
- IP65 3-pin XLR connectors IN/OUT
- Overheat protection
- -20°-40°C environment temperature
- IP65

## Light Output (FC=LUX × 0.0929)

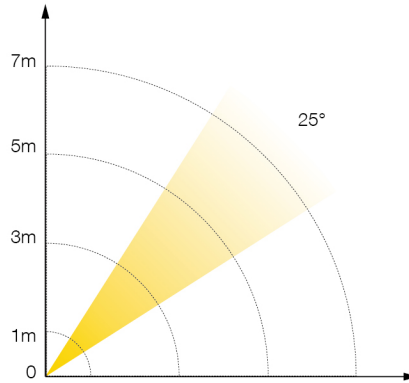

R	990	120	42	22
G	3480	480	160	86
B	5600	616	220	116
A	1630	187	61	37
W	3740	480	176	96
RGBAW	13420	1650	594	320

