



The JNR PAR 54x3 adopts 54 PCS high power 3W LEDs(4 in 1, RGBW) which features high brightness and stability. It is made of a new type of high temperature strength of cast aluminum casing with IP65 rating. It's available independently controlled and linkable with each other for operation. And JNR PAR 54x3 is applicable for large-scale live performances, theater, studio, nightclubs and discos.



JNR PAR 54x3

■ JNR-8161D


Specification

- Input Voltage: AC 90-260V 50/60Hz
- Light Source: 54x3W LEDs (RGBW)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 4/8 DMX channels USITT DMX-512
- Power Consumption: 100W
- Dimensions: 210(D)*210(W)*120(H)mm
- Packing Dimensions: 250(D)*250(W)*360(H)mm
- Net Weight: 4.0kg
- Gross Weight: 5.0kg


Detail

- 54x3W LEDs(4-in-1, RGBW), 50,000 hours
- Automatic operation with built-in programs
- Master-slave operation
- 25° Beam angle
- 0-100% electronic dimming
- High speed white color or color changing strobe with 1-13Hz frequency range
- DMX512, master-slave and sound activated or auto operation
- 4/8 DMX channels
- 3-pin XLR connectors IN/OUT
- 40°max environment temperature
- 60°max par light temperature
- T0.8A fuse
- Powercon connector IN/OUT
- IP65

Light Output (FC=LUX × 0.0929)

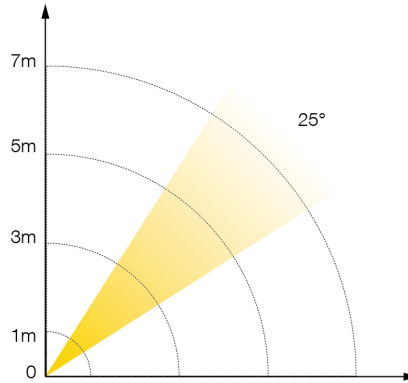

R	2200	260	95	40
G	3060	320	110	50
B	4080	430	150	72
W	3780	400	140	70
RGBW	12100	1250	460	240



4.0KG