

AQUA 480 BWS


Model: PR-2497

RoHS | CE |  |  |  | 480W |  18m |  | T_c150°C | T_a42°C | 

AQUA 480 BWS is PR new full featured IP65 moving light, which is designed to provide three features-Beam, Wash, Spot. It has adopted PR patented technology, combines advanced 480W lamp with superb optical system, 18 fixed gobos, 7 rotating gobos, CMY color mixing system, 3 independent prisms and 1 animation wheel. It is convenient and ideal for outdoor entertainment, concert, stadium and other lighting applications.

IP65, 480W, 3 in 1 




Fixed gobos

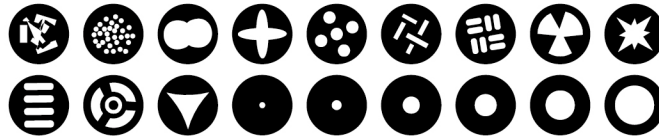

Rotating gobos (Ø22.5mm, image Ø9mm)



Scan with your Phone
to view more detail



42Kg 
Size(mm)

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
650W@220V
- Light Source
USHIO PR 480(480W), (6,900±300K, 1,500 hrs)
- Strobe
Double shutter blades, 0.3-25 F.P.S
- Dimmer
0-100% linearly dimming
- Colors
CMY linear color mixing system with macros
1 Color wheel: 12 dichroic color filters plus open
Rainbow effect with bi-directional and variable speeds
Stepping/linear color changing
- Gobos
1 Fixed gobo wheel: 18 gobos plus open
Bi-directionally rotatable, and shakable effect at variable speeds
1 Rotating gobo wheel: 7 interchangeable gobos plus open
Bi-directionally rotatable, and shakable at variable speeds
- CTO
Independent 0-100% linear CTO
- Prism/Frost
Three prisms(standard: 2x8-facet circular prisms and 1x4-facet linear prism)+frost+open, bi-directional rotation with variable speeds
Optional: 3-facet, 16-facet circular/linear/gradient prisms
- Focus
DMX linear focus
- Zoom
DMX linear zoom
- Head Movement
Pan 540°, tilt 270° with auto position correction
- Light Angle
Beam mode: 0°~2.8°
Spot mode: 2.8°~60°
Wash mode: 10°~60°
- Control
International DMX512, 5 pins interface
RDM control protocol
Short mode 22 channels, standard mode 30 channels and extended mode 34 channels
Self-test mode
- Other Functions
Adjustable pan & tilt speed
LCD display screen
Fixture and lamp usage time display
Modular structure for easy maintenance
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- Physical
Housing: cast aluminum and high temperature UV resistant
ABS, IP65
Ambient temperature: maximum 42°C
- Weight
Net weight: 42Kg
- Packaging
Standard: carton 740x740x670(mm)
Optional: flight case 620x570x780(mm)
- Accessories
G clamp, 2 pcs
5 Pins XLR connector, 1 set
Safety cord, 1 pc
Power cord, 1 pc
Optional: Ω clamp, 2 pcs

