


AQUA 380 Beam


Model: PR-2369

RoHS | CE |  |  |  |  | 380W |  | 12m |  | T_c150°C | T_a40°C | 

PR-2369 is 380W moving beam, a new member of AQUA family. It features PHILIPS Platinum 300S Flex lamp, 7800K, an advanced optical system, IP66 rated producing a precise and tight 2° beam aperture ideal for outdoor searchlight and big air looks.

IP66, 380W, Beam 


Fixed gobos

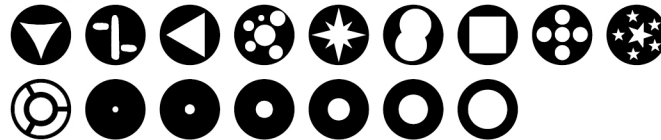

Rotating gobos (Ø12mm, image Ø6.0mm)



Scan with your Phone
to view more detail

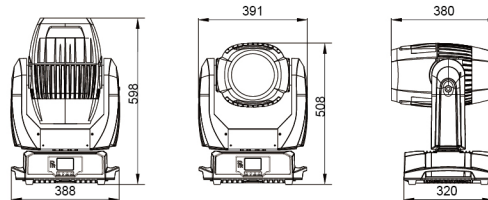

29Kg 
Size(mm)

Specifications

- **Input Voltages**
100-240V AC, 50/60Hz
- **Power Consumption**
570W@220V, 600W@100V
- **Light Source**
PHILIPS Platinum 300S Flex(7,800±300K), 6000 hrs
- **Strobe**
Mechanical strobe 0.3-20 F.P.S with macro
- **Dimmer**
Mechanical dimmer 0-100% linearly adjustable
- **Colors**
1 Color wheel: 12 dichroic color filters+CTO plus open
Rainbow effect with bi-directional and variable speeds
Stepping/linear color changing
- **Gobos**
1 Fixed gobo wheel: 16 gobos plus open
Bi-directionally rotatable, and shakable effect at variable speeds
1 Rotating gobo wheel: 12 interchangeable gobos plus open
Bi-directionally rotatable, and shakable at variable speeds
- **Prism and Frost**
Three prisms (8-facet+16-facet+linear)+frost+open
- **Focus**
Motorized linear focus
- **Head Movement**
Pan 540°, tilt 240° with auto position correction
- **Light Angle**
Beam angle: 2°
- **Control**
International DMX512, 5 pins interface
- **RDM control protocol**
Short mode 16 channels, standard mode 20 channels and extended mode 21 channels
Self-test mode
User memory and preset memory
- **Other Functions**
Adjustable pan & tilt speed
LCD display screen
Fixture and lamp usage time display
Modular structure for easy maintenance
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- **Physical**
Housing: cast aluminum and high temperature UV resistant
ABS, IP66
Ambient temperature: maximum 40°C
- **Weight**
Net weight: 29Kg
- **Packaging**
Standard: carton 515x480x690(mm)
Optional: flight case 715x516x835(mm), 2 in 1
- **Accessories**
G clamp, 2 pcs
5 Pins XLR connector, 1 set
Safety cord, 2 pcs
Power cord, 1 pc
Optional: Ω clamp, 2 pcs

