






PR-6000 Wash


Model: PR-2925

RoHS | CE |  |  WDMX | 1400W |  10m |  IP₂₀ | T_c150°C | T_a40°C | 


PR 6000 Wash is designed for a wide variety of applications where light fixture with outstanding and impactful color range and quality is required. It is the ultimate fresnel based 90 CRI OSRAM 1400W engine, combining with a PR patent optical system, 15-55 degree zoom, results in a perfectly smooth wash output. There are also two color wheels which include filters that can be utilized to adjust colour temperature.

Wash, high power 

Color Wheel

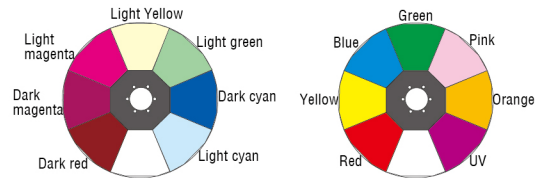

Scan with your Phone to view more detail

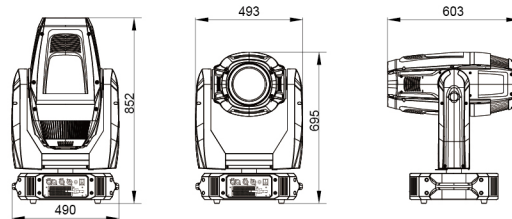

45Kg 
Size(mm)

Moving Heads

Specifications

- Input Voltages
200-240V AC, 50/60Hz
- Power Consumption
1800W@220V
- Light Source
OSRAM lok-it 1400/PS(CRI 90, 6000K, 750 hrs)
- Strobe
Double shutter blades, 0.3-25 F.P.S
- Dimmer
0-100% linear adjustment
- Colors
CMY linear mixing system with macros
2 Color wheels: each with 7 dichroic color filters plus open
Half color effect, rainbow effect with bi-directional and
variable speeds
Stepping/linear color changing
- CTO
0-100% linear CTO system
- Zoom
DMX linear zoom
- Head Movement
Pan 540°, tilt 270° with auto position correction
- Light Angle
9° in highlight mode, 15°~55°
- Control
International DMX512, 5 pins(optional 3 pins) interface
RDM control protocol
Short mode 16 channels, standard mode 20 channels and
extended mode 24 channels
Self-test mode
- Other Functions
Adjustable pan & tilt speed
Lamp and total hours displayed
LCD English with contrast and brightness adjustable
Energy saving ballast
Built-in sensor diagnostic system
Built-in chargeable battery and menu setting without power
mains
Input signal isolation
Modular structure for easy maintenance
Ethernet interface
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- Physical
Housing: composite plastic, IP20
Ambient working temperature: maximum 40°C
- Weight
Net weight: 45Kg
- Packaging
Standard: carton 870x660x770(mm)
Optional: flight case 690x620x935(mm)
- Accessories
G clamp, 2 pcs
5 pins XLR connector, 1 set
Safety cord, 2 pcs
Power cord, 1 pc
Optional: Ω clamp 2 pcs

