






# XR 1700 Wash

Model: PR-2885


RoHS | CE |  |  | 1700W |  10m |  | T<sub>c</sub>150°C | T<sub>a</sub>40°C | 

XR 1700 Wash is an extremely bright wash fixture offering outstanding projection quality in any environment. It houses OSRAM 1700W engine which is calibrated at 5600K. XR 1700 Wash boasts a sophisticated CMY color mixing system for perfect color mixing, two color wheels that combine to produce an infinite palette of vivid pastels and saturated colors. It houses a 20° to 62° motorized zoom that maintains a flat field of focus even when fully wide, and can be controlled by DMX-RDM, ArtNet or W-DMX.


Wash, 1700W



Color Wheel

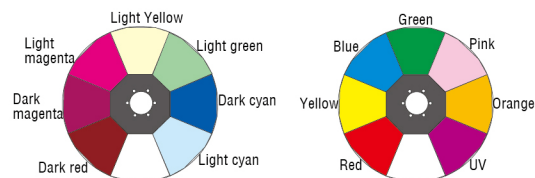

Scan with your Phone  
to view more detail

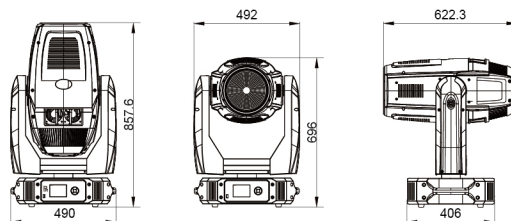

46Kg   
Size(mm)

## Specifications

- Input Voltages  
200-240V AC, 50/60Hz
- Power Consumption  
2100W@220V
- Light Source  
OSRAM lok-it 1700W/PS(5,600K, 750 hrs)
- Strobe  
Double shutter blades, 0.3~25 F.P.S
- Dimmer  
0-100% linear adjustment
- Colors  
CMY linear color mixing with macros  
2 Color wheel: each with 7 dichroic color filters plus open  
Half color effect, rainbow effect with bi-directional and variable speeds  
Stepping/linear color changing
- CTO  
0-100% linear CTO system
- Zoom  
DMX linear zoom
- Head Movement  
Pan 540°, tilt 270° with auto position correction
- Light Angle  
12° in highlight mode  
20°~62°
- Control  
International DMX512, 5 pins(optional 3 pins) interface  
Short mode 14 channels, standard mode 19 channels, extended mode 24 channels, self-test mode
- Other Functions  
Adjustable pan & tilt speed  
Lamp and total hours displayed  
LCD English display with contrast and brightness adjustable  
Touch screen  
Energy saving ballast  
Input signal isolation  
Modular structure for easy maintenance  
Ethernet interface  
DMX512 wireless receiver  
DMX512 wireless transmitter(optional)
- Physical  
Housing: high temperature engineering plastic, IP20  
Ambient temperature: maximum 40°C
- Weight  
Net weight: 46Kg
- Packaging  
Standard: carton  
Optional: flight case
- Accessories  
G clamp, 2 pcs  
5 pins XLR connector, 1 set  
Safety cord, 1 pc  
Power cord, 1 pc  
Optional: Q clamp, 2 pcs

