






XR 380 BWS

Model: PR-2393

RoHS | CE |  |  | 380W |  10m |  | T_c150°C | T_a40°C | 

The XR 380 BWS is a new hybrid versatile 3-in-1 (Beam, Wash, Spot) luminaire which boasts the same features as XR 350B BWS including the new PHILIPS MSD silver 380W lamp. With 2.3° to 10° zoom in beam mode, 2.3° to 40° zoom in spot mode and 10° to 60° zoom in wash mode, XR 380 BWS is ideal for use in churches, nightclubs, theatres and concert venues.

3 in 1, 380W




Fixed gobos



Rotating gobos (Ø15.9mm, image Ø12.5mm)



Scan with your Phone
to view more detail

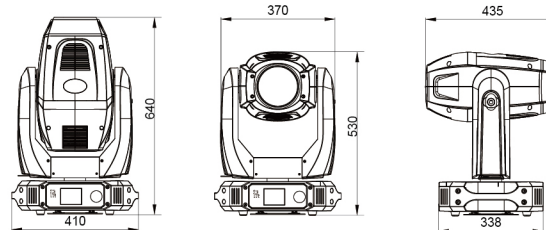

22.2Kg
Size(mm)

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
540W@220V
- Light Source
PHILIPS MSD Silver 380W(7,800K, 1,500 hrs)
- Strobe
Double shutter blades, 0.3~25 F.P.S
- Dimmer
0-100% linear adjustment
- Colors
CMY linear color mixing with macros
1 Color wheel: 13 dichroic color filters(with CTO) plus open
Rainbow effect with bi-directional and variable speeds
Stepping/linear color changing
- Gobos
1 Fixed gobo wheel: 10 gobos+open+ animation effect
Bi-directionally rotatable, and shakable effect at variable speeds, 2 channels to control gobos and shift between animation effects
1 Rotating gobo wheel: 9 interchangeable gobos plus open
Bi-directionally rotatable, and shakable at variable speeds
- Prism
Two prisms(standard: 8-facet and 16-facet prisms)
Optional: 3-facet prism and gradient prisms
Bi-directional rotating at variable speeds
- Frost
One frost filter
- Independent Diffuser
One independent diffuser, optional even beam mode
- Focus
DMX linear focus
- Zoom
DMX linear zoom
- Head Movement
Pan 540°, tilt 270° with auto position correction
- Light Angle
Beam mode: 2.3°~10°
Spot mode: 2.3°~40°
Wash mode: 10°~60°
- Control
International DMX512, 3 pins and 5 pins interface
Short mode 23 channels, standard mode 28 channels, extended mode 33 channels, self-test mode
- Other Functions
Adjustable pan & tilt speed
LCD display screen
Fixture and lamp usage time display
Setup options by chargeable battery inside without power connection
Modular structure for easy maintenance
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- Physical
Housing: high temperature engineering plastic, IP20
Ambient temperature: maximum 40 C
- Weight
Net weight: 22.2Kg
- Packaging
Standard: carton 640x510x530(mm)
Optional: flight case 860x550x750(mm)

- Accessories
G clamp, 2 pcs
5 pins XLR connector, 1 set
Safety cord, 1 pc
Power cord, 1 pc
Optional: Ω clamp, 2 pcs

