



OMEGA

Model: PR-8132

RoHS | CE | WDMX | LED | 5m | IP20 | T_c150°C | T_a45°C | 


OMEGA is a fantastic moving zoom bar effect luminaire producing a powerful zoomable blade of light, which creates beautiful soft wash light. The versatile unit has a zoom range from 3° to 60° and each pixel can be individually controlled. Thanks to OSRAM 6 pcs 60W RGBW 4 in 1 LEDs, the light output can be easily turned into a dynamic ray of microbeam in the air.

RGBW, Zoom bar, LED 

LED Lighting



Scan with your Phone to view more detail

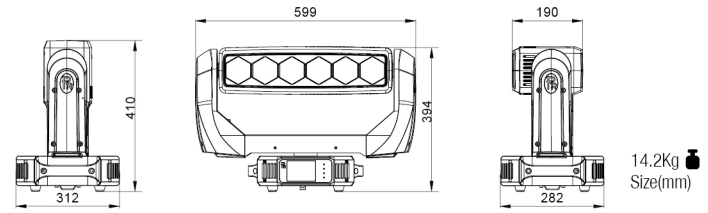

14.2Kg
Size(mm)

Specifications

- **Input Voltages**
100-240V AC, 50/60Hz
- **Power Consumption**
500W@220V
- **Light Source**
OSRAM 6x60W LEDs(RGBW, 4 in 1), 50,000 hrs
- **Strobe**
Electronic strobe, 0-25 F.P.S, preset pulse strobe effect
- **Dimmer**
0-100% linear adjustment
- **Colors**
RGBW and color mixing, with macros
Linear color temperature correction from 2,700K to 10,000K
- **Effect**
Rainbow, wash, beam and multiple macro effects
- **Head Movement**
Pan: 540° and endless, tilt: 270° and endless, with auto position correction
- **Light Angle**
(1/2 peak) $\theta_{1/2}$: 3°~ 60°
- **Control**
International DMX512, 3 pins and 5 pins interface
Short mode 27 channels, standard mode 31 channels, and extended mode 51 channels
Master-slave mode, stand-alone mode, self-test mode, single scene mode
- **Other Functions**
Pixel control, each color of RGBW of a LED lamp controllable
Touch screen and its brightness adjustable
Adjustable pan & tilt speed
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
Firmware upgraded via DMX interface and XLR cable

Fixture hours display, DMX channel number, software versions are displayed and display inversion
Over temperature protection

- **Physical**
Housing: high temperature engineering-plastic, IP20
Ambient working temperature: -20°C~45°C
- **Weight**
Net weight: 14.2kg
- **Packaging**
Standard: carton 695x500x395(mm)
Optional: flight case 755x650x620(mm), 2 in 1
- **Accessories**
G clamp, 2 pcs
5 pins XLR connector, 1 set
Safety cord, 1 pc
Power cord, 1 pc
Optional: Ω clamp, 2 pcs

