






ARC LED 1572

Model: PR-6262

RoHS | CE |  |  | LED |  10m |  | T_c:150°C | T_a:40°C | 

ARC LED 1572 is a new launched exterior architectural luminaire, with two independent heads. It features 72 pcs of Philips 15W LEDs(RGBW 4 in 1), color temperture linear adjustment, combined with 4 individual areas control, 37° x 57° square light, rating IP67. It's ideal for medium and large scale stadiums, architectural lighting, theme parks, etc.


IP67, RGBW, High power



Architectural Lighting



Scan with your Phone
to view more detail

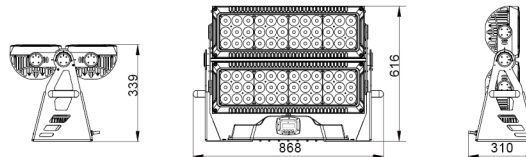

46Kg
Size(mm)

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
1080W@230V
- Light Source
PHILIPS 72x15W(RGBW 4 in 1), 50,000 hrs
- Strobe
Electronic strobe, 0-25 F.P.S(pulse strobe effect)
- Dimmer
0-100% linearly adjustable
- Colors
R/G/B/W and color mixing , with macro
- Light Angle
Beam angle(1/2peak) $\theta_{1/2}$: 14°
Field angle(1/10peak) $\theta_{1/10}$: 37° x 57°
- Control
International DMX512, 3 pins(optional 5 pins) interface
Standard mode 10 channels and extended mode 23 channels
Master-slave mode, stand-alone mode, test mode
16 Preset memories, 16 user memories
Preset memories and user memories can be loaded by control channels, 16 level speeds adjustable
- Other Functions
LED board temperature display
Fixture usage time display
Brightness level control
Timer control
DMX mode, setting status, operation mode and user memory data can be transmitted by synchronous control
DMX512 wireless receiver(optional)
DMX512 wireless transmitter(optional)

- Physical
Housing: high-intensity die-casting aluminum, IP67
Ambient working temperature: -20°C~40°C
- Weight
Net weight: 46kg
- Packaging
Standard: carton 1095x520x532(mm)
Optional: flight case
- Accessories
G clamp, 2 pcs
XLR cable, 1 pc
Safety cord, 1pc
Optional: omega clamp, 2 pcs

