



The JNR PAR 18x18 adopts 18 PCS 18W 6-in-1 LEDs which features high brightness and stability. It's made of a new type of high temperature strength of castaluminum casing with nice outlook. The fixture is designed and manufactured strictly following CE standards, complying with international standard DMX512 protocol. It' s available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, nightclubs and discos.



## JNR PAR 18x18

■ JNR-8045A


### Specification

- Input Voltage: AC 100-240V 50/60Hz
- Light Source: 18x18W LEDs (6-in-1, RGBWAUV)
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 6/10 DMX channels USITT DMX-512
- Power Consumption: 220W
- Dimensions: 324(D)\*220(W)\*262.4(H)mm
- Packing Dimensions: 260(D)\*260(W)\*370(H)mm
- Net Weight: 2.3kg
- Gross Weight: 2.8kg

**Detail**

- 18x18W LEDs (6-in-1, RGBWAUV), 100,000 hrs
- Aluminum die-casting structure design with optimum cooling system
- Infinite RGBW color mixing system and rainbow effect
- 16.7million additive RGB colors whit full saturation control
- DMX512, Master-Slave, Sound Activated and auto operation
- 6/10 DMX channels
- Built-in programs that could be called up via a DMX controller
- 0-20Hz strobe effect and pulse strobe effect
- 0-100% electronic dimming and blackout for all LEDs
- Independent ID address
- Different white colors setting
- 25° beam angle
- 4-button LED display on rear panel
- Dual bracket system available for setting the fixture on the ground or hanging
- Linkable via 3-pin XLR cables
- Overheat protection
- -20°C~40°C environment temperature
- T0.8A fuse
- IP20

**Light Output** (FC=LUX × 0.0929)

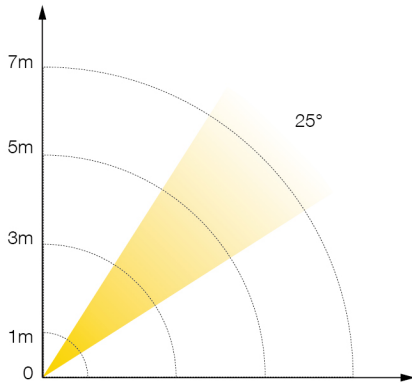

R	193/2079	21/228	71/77	5/48
G	225/2420	25/264	92/99	5/56
B	235/2530	26/280	10/110	5/51
W	369/3960	40/440	15/165	7/80
A	153/1650	160/171	6/66	3/30
UV	60/660	6/60	2/22	1/8
RGBW+UV	1144/12320	143/1540	50/532	25/275

