

# AQUA LASER 260 BEAM


RoHS | CE |  |  |  | 550W |  $\sim 18m$  |  |  $T_c 150^\circ C$  |  $T_a 45^\circ C$  | 

Model: PR-8329


Moving Heads






Scan with your Phone to view more detail

IP66, Beam 

Fixed gobos

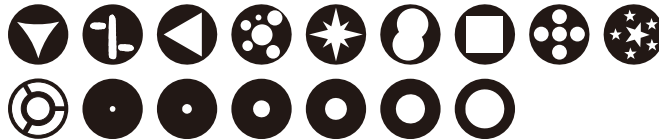

Rotating gobos (Ø12mm, image Ø6.0mm)



39Kg   
Size(mm)

Aqua Laser 260 Beam (PR-8329) is a trendy, energy-saving, environmentally friendly and water-proof fixture with a laser engine as its light source, a full and saturated beam with sharp edges and the angle of 0.8°. Being close to parallel beam makes it have very high intensity, other characteristics of beam fixtures and up to 460000lux at a distance of 20 meters, surpassing traditional light sources. The fixture has a color wheel (16 colors + 2 CTOs + 1 CTB + open), a gobo wheel (30 gobos), 3 prisms, a frost filter and a linear focus, and it is an all-weather product with ingress protection of IP66.

## Specifications

- Input Voltage  
100V~240V AC, 50/60Hz
- Power Consumption  
390W @ 220V
- Light Sources  
BLL260-80-R00-000(8500K,12000hrs)
- Colors  
1 color wheel: 19 colors + open  
Macros and bi-directional rainbow effects with variable speeds  
Optional: a linear CYM color mixing system
- Fixed Gobo Wheel  
1 fixed gobo wheel: 30 gobos  
Shakable at variable speeds and bi-directional rotation at variable speeds  
Optional: a rotating gobo wheel (12 gobos+ open)
- Prism/Frost:  
2 prism wheels: 1 wheel (an 8-facet circular prism+ a 4-facet linear prism )+1 wheel (a 16-facet circular prism + a frost filter), prisms overlapped. Other prism options available.
- Focus  
DMX linear focus
- Strobe/Dimmer  
Double flag strobe, 0.3-25 F.P.S. / linear dimmer
- Movements  
Pan (0 ° -540 ° ), Tilt(0 ° -270 ° ) with auto positioning correction function
- Beam Angle  
Beam angle: 0.8°
- Control  
International standard DMX 512 signal,5-pin XLR connectors
- Short Mode 15 channels , standard Mode 17channels,extended mode 18channels  
Self test mode
- Other Functions  
Pan and Tilt speeds adjustable  
Lamp hours and fixture hours displayed  
Modular construction easy for maintenance  
Wireless receiver  
Optional wireless transmitter  
Optional Art-Net function
- Housing  
Cast aluminum and high temperature and UV resistant ABS with IP66
- Net Weight  
37.6Kgs
- Ambient Temperature  
45°C at maximum for ambient temperature
- Accessories  
Safety cord 1 Pc  
User manual 1 Pc

