

AQUA LASER 260 BEAM


RoHS | CE |  |  |  | 550W | $\sim 18m$ |  | $T_c 150^\circ C$ | $T_a 45^\circ C$ | 

Model: PR-8339


Moving Heads






Scan with your Phone to view more detail

IP66, Beam 

Fixed gobos

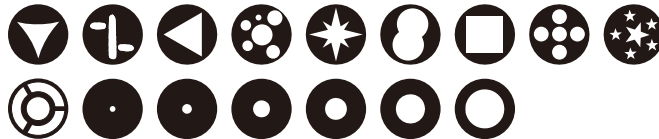

Rotating gobos (Ø12mm, image Ø6.0mm)



39Kg 
Size(mm)

Specifications

- **Input Voltage**
100V~240V AC, 50/60Hz
- **Power Consumption**
420W @ 220V
- **Light Sources**
BLL260-80-R00-000 (8500K, 12000hrs)
- **Colors**
1 color wheel: 19 colors + open
Macros and bi-directional rainbow effects with variable speeds
a linear CYM color mixing system
- **Gobo Wheels**
1 fixed gobo wheel: 30 gobos
Shakable at variable speeds and bi-directional rotation at variable speeds
1 Rotating gobo wheel: 12 gobos+ Open
Shaking and bi-directional wheel scrolling at variable speeds
- **Prism/Frost**
2 prism wheels: 1 wheel (an 8-facet circular prism+ a 4-facet linear prism)+1 wheel (a 16-facet circular prism + a frost filter),
prisms overlapped. Other prism options available.
- **Focus**
DMX linear focus
- **Strobe/Dimmer**
Double flag strobe, 0.3-25 F.P.S. / linear dimmer
- **Movements**
Pan (0 ° -540 °), Tilt(0 ° -270 °) with auto positioning correction function
- **Beam Angle**
Beam angle: 0.8°
- **Control**
International standard DMX 512 signal,5-pin XLR connectors
Short Mode 21 channels, standard Mode 25 channels, extended mode 28 channels
Self test mode
- **Other Functions**
Pan and Tilt speeds adjustable
Lamp hours and fixture hours displayed
Modular construction easy for maintenance
Wireless receiver
Optional wireless transmitter
Art-Net function
- **Housing**
Cast aluminum and high temperature and UV resistant ABS with IP66
- **Weight**
Net weight: 39 Kgs
- **Ambient Temperature**
45°C at maximum for ambient temperature
- **Accessories**
Safety cord 1 Pc
User manual 1 Pc

