




AQUA 480 Beam

Model: PR-2469

RoHS | CE |  | WDMX | 480W | \angle 18m |  | T_c75°C | T_a45°C | 

Version: 20240820


AQUA 480 Beam is a waterproof and IP66 rated fixture. It has beam angle of 2° with sharp edges. It can produce a number of effects via CMY system, 18 fixed gobos, 7 rotating gobos and etc.. It is ideal for outdoor entertainment, concerts and etc..




IP65, 480W, Beam



Fixed gobos

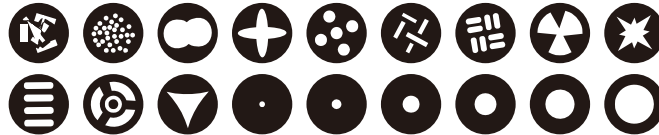

Rotating gobos (Ø22.5mm, image Ø12mm)

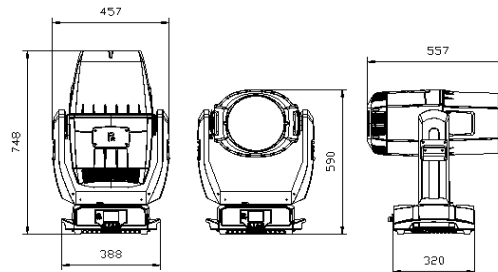

37.6Kg 
Size(mm)

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
650W@220V
- Light Source
PR 480 L(6900K, 1500 hrs)
- Strobe
Double shutter blades, 0.3-25 F.P.S
- Dimmer
0-100% linearly adjustable
- Colors
CMY linear color mixing system with macros
1 color wheel: 12colors+ Open
Rainbow effect with bi-directional and variable speeds
Stepping/linear color changing
- Gobos
1 Fixed gobo wheel: 18 gobos + open
Bi-directionally rotatable, and shakable effect at variable speeds
1 Rotating gobo wheel: 7 interchangeable gobos + 1white
Bi-directionally rotatable, and shakable at variable speeds
- CTO
0-100% linear CTO
- Prism / Frost
3Pcs of independent prisms which can be overlapped
(8-facet circular prisms and 4-facet linear Prism) (16-facet circular + frost) or other prism options
- Focus
DMX linear focus
- Head Movement
Pan 540°, tilt 270° with auto position correction
- Light Angle
Beam angle: 2°
- Control
DMX512, 5-pin interfaces(Optional 3-pin)
22channels in short mode, 26channels in standard mode
and 30channels in extended mode
Self-test mode
- Other Functions
Adjustable Pan & Tilt speed
Lamp' s and fixture' s hours displayed
Modular Structure for easy maintenance
DMX512 wireless receiver
Optional DMX512 Wireless Transmitter
Optional ArtNet function
- Physical
Housing: cast aluminum and high temperature UV resistant
ABS, IP66
Ambient temperature: maximum 45°C
- Weight
Net weight: 37.6Kg
- Packaging
Standard: carton 745x665x600(mm)
Optional: flight case 620x570x780(mm)
- Accessories
G clamp, 2 pcs
5 Pins XLR connector, 1 set
Safety cord, 1 pc
User manual, 1 Pc
Optional: Ω clamp, 2 pcs

■ Light Output

