

PR-6000 Wash/Framing(1400W)

Model: PR-2926

RoHS | CE | DMX | 1400W | 18m | IP20 | T_c170°C | T_a40°C

Version:20250912



Moving Heads



PR-6000 Wash/Framing(1400W) is a moving head fixture with highly photoelectric efficiency, low noise and multiple functions including Wash and Framing. It is with Osram Lok-it 1400/PS lamp, optical design with wide zoom range, 200mm front lens, beam angle(10° ~ 60°), primary and secondary reflectors, resulting in very intensive and high CRI beam, and linear color mixing system of CMY+CTO and plenty of effects by double color wheels. The convenient, fast, easy and unique invented technology which is 360 ° continually rotating framing system can position at any angle precisely and solve a big internationally difficult problem of not having continually rotating framed images faced by the light designers.

Wash and Framing, high power

Color Wheel

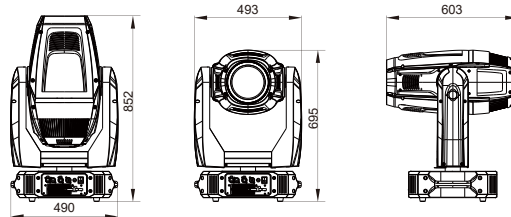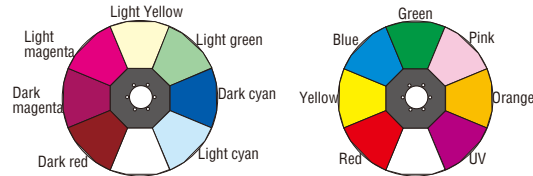

46Kg
Size(mm)

Specifications

- Input Voltages
200-240V AC, 50/60Hz
- Power Consumption
1800W@220V
Power factor: PF>0.90
- Light Source
OSRAM lok-it 1400/PS(CRI>90, 6000K, 750 hrs)
- Strobe
Double shutter blades, 0.3-25 F.P.S
- Dimmer
0-100% linear adjustment
- Colors
CMY color mixing with macros
2 color wheels: each with 7 colors+ open
Half color effect, bi-directional rotation with varied speeds for rainbow effect
Stepping/Linear color changing
- CTO
0-100% linear CTO system
- Focus
DMX linear focus
- Head Movement
Pan 540°, tilt 270° with auto position correction
- Light Angle
linear zoom 10°~ 60°with 16 bit function
- Control
DMX512, 3 pin and 5 pin interfaces
RMD control protocol

27channels in short mode, 32channels in standard mode and 45channels in extended mode
Self-test mode

- Other Functions
Adjustable Pan & Tilt speed
Lamp and Total hours displayed
LCD English and Chinese Display with Contrast and brightness adjustable
Energy saving ballast
Built-in sensor diagnostic system
Input signal isolation
Modular Structure for easy maintenance
Ethernet Interface
DMX512 wireless reciever
DMX512 Transmitter(Optional)
ArtNet and sACN(Optional)

- Physical
Housing: composite plastic, IP20
Ambient working temperature: maximum 40°C

- Weight
Net weight: 46Kg

- Packaging
Standard: carton 840x640x738(mm)
Optional: flight case 720x580x900(mm)

- Accessories
clamp, 2 pcs
XLR connector, 1 set
Safety cord, 2 pcs
User manual, 1pc

Light Output

