





AQUA Laser 500 Beam

Model: PR-8369


RoHS | CE |  | WDMX |  18m |  T_c75°C | T_a45°C | 

Version: 20240311




Aqua Laser 500 Beam (PR-8369) is a trendy, energy-saving, environmentally friendly and water-proof fixture with a laser engine as its light source, having a super-wide front lens of 230mm, a full and saturated beam with sharp edges and the angle of 0.8°. It has very strong beam and cubic effects with high intensity and much longer projecting distance. Being close to parallel beam makes it have very high intensity, other characteristics of beam fixtures and up to 760000lux at a distance of 20 meters, surpassing traditional light sources.

IP66, Beam 

Fixed gobos

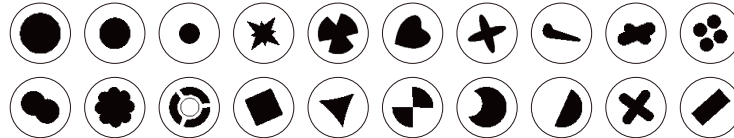

Rotating gobos (Ø10mm, image Ø6.0mm)



39.5Kg 
Size(mm)

Moving Heads



Specifications

- **Input Voltages**
100V~240V AC, 50/60Hz
- **Input Power**
670W @ 220V
Power factor: PF>0.9
- **Lamp Specifications**
500W laser module (9000K,12000hrs)
- **Colors**
1 color wheel: 19 colors + open
Macros and bi-directional rainbow effects with variable speeds
A linear CYM color mixing system
- **Gobos**
1 fixed gobo wheel: 30 gobos
Shakable at variable speeds and bi-directional rotation at variable speeds
1 Rotating gobo wheel: 12 gobos+ Open
Shaking and bi-directional wheel scrolling at variable speeds
- **Prism/Frost**
2 prism wheels: 1 wheel (an 8-facet circular prism+ a 4-facet linear prism)+1 wheel (a 16-facet circular prism + a frost filter), prisms overlapped. Other prism options available
- **Focus**
DMX linear focus
- **Dimmer/Strobe**
Double flag strobe, 0.3-25 F.P.S. / linear dimmer
- **Head Movement**
Pan (0°-540°), Tilt(0°-270°) with auto positioning correction function
- **Beam Angle**
0.8°
- **Control**
International standard DMX 512 signal,5-pin XLR connectors
Short Mode 21 channels, standard Mode 25 channels, extended mode 28 channels
Self test mode
- **Other Functions**
Pan and Tilt speeds adjustable
Lamp hours and fixture hours displayed
Modular construction easy for maintenance
Wireless receiver
Wireless transmitter (Optional)
ArtNet and sACN (Optional)
- **Housing**
Cast aluminum and high temperature and UV resistant ABS with IP66
- **Net Weight**
39.5 Kg
- **Ambient Temperature**
-20 °C ~ 45 °C
Note: If a fixture runs with the ambient temperature below 0 Celsius, it should be heated for some time(less than 20 minutes based on actual conditions) before turning on the laser module

■ Light Output

