

XR 230 Beam

Model: PR-2207

RoHS | CE | RDMX | 230W | 18m | IP20 | T_c80°C | T_a40°C | 

Version: 20260901





XR 230 BEAM is an incredible fixture with high efficiency and luminance, having a color wheel (14 colors+open), 0-100% linear dimmer, a fixed gobo wheel (17 gobos + open) and an 8-facet prism, creating gorgeous beam with its beam angle at 3.6°.



Beam, 230W



Fixed gobos

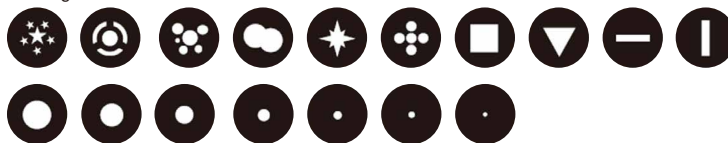

14.5Kg
Size(mm)

Specifications

- Input voltage
100V~240V AC, 50/60Hz
- Input power
350W@220V
Power factor PF>0.90
MAX. Current: 1.5A @ 220V
- Light Source
Osram SIRIUS HRI 231W
Color temperature 7900K
Rated life 2000hrs, Energy save mode 2500hrs
- Colors
1color wheel: 14colors+ Open
rainbow effect with bi-directional and variable speeds,
Stepping/linear color changing
- Gobos
1 fixed gobo wheel: 17gobos+open
bi-directionally rotatable, and shakable at variable speeds
- Prism/Frost
1 8-facet prism(bi-directional rotation with variable
speeds)+frost filter+open
3-24 facet prism (Optional)
- Focus
DMX linear focus
- Dimmer/Strobe
0-100% linearly adjustable/Double shutter blades,
0.3~25 F.P.S
- Head Movement
Pan 540°, Tilt 270° with 16 bit control
- Beam Angle
0°~3.6°
- Control
International standard DMX 512 protocol, 5-pin interface
13channels in short mode ,14channels in standard mode
and 16channels in extended mode
Adjusting mode
- Other Functions
Adjustable Pan & Tilt speed
Lamp' s and fixture' s hours displayed
Modular Structure for easy maintenance
- Housing
High temperature ABS, IP20
- Operation Temperature
Maximum ambient temperature 40°C
- Weight
14.5 kg
- Accessories
G clamp, 2 pcs
XLR connectors, 1set (male and female)
safety cord, 1 pc
user manual, 1 pc
Optional omega clamp, 2 pcs

■ Light Output

