


XLED 1061

Model: PR-8121



The XLED 1061 is a powerful LED wash moving head. It's equipped with 61 pcs LEDs of 10 watts each RGBW 4 in 1. The color mixing of this unit is highlighted by animation effects, rainbow effects and pulse strobe. Delivering so much "bang for your money" it is certain to find a favorite place with LED and rental companies looking to derive maximum output and flexibility from a minimum footprint.


Powerful, RGBW, LED



LED Lighting



Scan with your Phone to view more detail

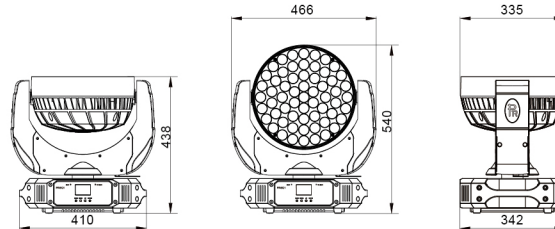

20Kg
Size(mm)

Specifications

- Input Voltages
100-240V AC, 50/60Hz
- Power Consumption
650W@220V
- Light Source
CREE 61x10W LEDs(RGBW, 4 in 1), 50,000 hrs
- Strobe
Electronic strobe, 0-25 F.P.S, pulse strobe
- Dimmer
0-100% linear adjustment
- Colors
R/G/B/W and color mixing, with macros
Rainbow and animation effects
Linear color temperature correction from 2,700K to 10,000K
- Head Movement
Pan 540°, tilt 270° with auto position correction
Swap and invert functions of pan and tilt
- Light Angle
Beam angle(1/2 peak): 13°~52°
Filed angle(1/10 peak): 30°~70°
- Control
International DMX512, 3 pins and 5 pins interface
RDM control protocol
Standard mode 17 channels and extended mode 30 channels
Master/slave mode, stand-alone mode, static scene mode,
self test mode
- Other Functions
Adjustable pan & tilt speed
LCD display and its brightness adjustable
Lamp temperature & project's use time display
Menu invert function
DMX512 wireless receiver
DMX512 wireless transmitter(optional)
- Physical
Housing: high temperature, ABS+die-casting aluminum, IP20
Ambient working temperature: -20°C~40°C
- Weight
Net weight: 20kg
- Packaging
Standard: 560x525x435(mm)
Optional: 1127x520x745(mm) 2 in 1
- Accessories
Power cord, 1 pc
G clamp, 2 pcs
5 pins XLR connector, 1 set
Safety cord, 1 pc
Optional: Ω clamp, 2 pcs

